

# **PLUGIN 2.0 - Oracle network with better decentralization & security**

Built on XinFin (XDC) Blockchain Network as an open source initiative

Table of Contents

<b>Disclaimer</b>	<b>4</b>
<b>Abbreviations</b>	<b>5</b>
<b>1. Introduction</b>	<b>6</b>
<b>2. PLUGIN - Decentralized Oracle Network(DON)</b>	<b>6</b>
2.1 Plugin’s Decentralized Oracle Network Overview	6
2.2 PLUGIN Interfaces	7
2.2.1 Networking	7
2.2.2 Computation	8
2.2.3 Storage	8
2.3 PLUGIN Community	8
2.4 Plugin partnerships	8
2.4.1 TeejLab Inc	8
2.4.2 Inclusive Growth Chain	9
2.4.3 Agri Tech	9
2.4.4 Ambient Global	9
2.4.5 FireBlocks	9
2.5 Plugin’s key design focus areas	10
<b>3. PLUGIN 2.0: Plugin Improvement Protocol(PLIP)</b>	<b>10</b>
3.1 Validator Node Pool/Processor Node Pool	11
3.1.1 Criteria for Onboarding Validator Nodes	11
3.1.2 Infrastructure requirement for Validator Nodes	12
3.2 Pre-Processor Node Pool	12
3.2.1 Criteria for Onboarding Pre-Processor Nodes	12
3.2.2 Infrastructure requirement for Pre-Processor Nodes	12
3.3 Staking Node Pool/Standby Node Pool	12
3.3.1 Criteria for standby nodes to become validator nodes	12
3.3.2 Infrastructure requirement for Standby Nodes	13
3.4 Advantages of Plugin Improvement Protocol	13
3.5 Implementation Plan	13
3.6 Revenue Stream	14
3.7 Reputation	14
<b>4. Plugin Data Feeds</b>	<b>15</b>
4.1 Components of a data feed	16
4.2 Types of Data Feeds	16
4.3 Setting up Data Feeds	16
4.4 Advantages of Plugin Data Feeds	17
<b>5. Plugin Ecosystem</b>	<b>17</b>
<b>6. Plugin Tokenomics</b>	<b>18</b>
6.1 Proof of Reserve for Staking	18
6.2 Re-Staking	19

<b>7. Plugin Innovations</b>	<b>19</b>
7.1 Plugin Truffle Box	19
7.2 React-Solidity-XDC3 Web package	19
7.3 Accept XDC or XRC20 tokens as Payment method	21
7.4 Connect XDCPay wallet with Web3Modal	21
7.5 Automation of Data Feeds Set up	21
<b>8. Plugin Game changing DApps</b>	<b>21</b>
8.1 Plugin Weather Forecast Node	21
8.2 Plugin Crop Loss Compensation	21
8.3 Plugin Real time air pollution tracking	22
8.4 Plugin Flight Delay Compensation	22
8.5 Plugin Emergency Care Connect	22
8.6 Plugin's XDC Eco Drive	22
<b>Conclusion</b>	<b>23</b>
<b>Acknowledgements</b>	<b>23</b>
<b>References</b>	<b>23</b>

## Disclaimer

The purpose of this document is to present information about the Plugin Decentralized Oracle Network Powered by XinFin Blockchain Network. The information set forth above may not be exhaustive and does not imply any elements of a contractual relationship. Its sole purpose is to provide relevant and reasonable information on whether to undertake a thorough analysis of the project to be used for various smart contracts.

Whilst every effort is made to ensure that statements of facts made in this document are accurate, all estimates, projections, forecasts, prospects, expressions of opinion, and other subjective judgments contained in this paper are based on assumptions considered to be reasonable as of the date of the document in which they are contained and must not be construed as a representation that the matters referred to therein will occur. Any plans, projections, or forecasts mentioned in this paper may not be achieved due to multiple risk factors. No information in this whitepaper should be considered to be business, legal, financial, or tax advice. We suggest that you do your own research and consult your own legal, financial, tax, or other professional advisers about Decentralized Oracle Network respective businesses and operations.

This whitepaper does not constitute a prospectus or offer document of any sort and is not intended to constitute an offer of securities or a solicitation for investment in securities in any jurisdiction. No person is bound to enter into any contract or make a binding legal commitment.

No regulatory authority has examined or approved any of the information set out in this whitepaper. No such action has been or will be taken under the laws, regulatory requirements, or rules of any jurisdiction. The publication, distribution, or dissemination of this whitepaper does not imply that the applicable laws, regulatory requirements, or rules have been complied with.

This whitepaper is subject to change as the product progression and development advances. Changes will be reflected in future updated/revised whitepaper versions.

## Abbreviations

<b>Abbreviation</b>	<b>Definition</b>
API	Application Programming Interface
AWS	Amazon Web Services
CRT	Carbon Reduction Token
DApp	Decentralized Application
DeFi	Decentralized Finance
DFP	Data Feed Providers
DLT	Distributed Ledger Technology
DON	Decentralized Oracle Network
EA	External Adaptor
EI	External Initiator
EOI	Expression of Interest
ETH	Ether
GHG	GreenHouse Gas
IGC	Inclusive Growth Chain
IP	Internet Protocol
IT	Information Technology
KYO	Know Your Operator
KYP	Know Your Provider
NPM	Node Package Manager
OBD	On-Board Diagnostic
OS	Operating System
PLI	Plugin Utility token
PLIP	Plugin Improvement Protocol
pm2	Process Manager 2
RAM	Random Access Memory
RPC	Remote Procedure Call
SEaaS	Sensing-as-a-Service
SLA	Service Level Agreement
WFN	Weather Forecast Node
XDC	XinFin Digital Contract
XRC20	XinFin Request for Comment, 20 is the proposal identifier number

# 1. Introduction

Blockchain technology continues to grow and touch many parts of our lives and it is important to support the expansion by connecting blockchain's Distributed Ledger Technology(DLT) to the existing legacy systems and applications built on a different technology. Oracles provides a secure form of communication between blockchain and the external world by providing off-chain data from the external world to the blockchain network's on-chain environment. While the oracle network allows external connectivity to blockchain, centralized oracle network still poses the problem of over-reliance on third parties which blockchain addresses primarily, termed as Oracle problem.

Decentralized Oracle Network(DON) overcomes the 'Oracle Problem' by distributing trust among multiple parties, similar to how blockchain works. Hybrid smart contracts of Decentralized Oracle Network provides interoperability, enhanced performance, multi-party trust model and transparency in the bidirectional communication of blockchain and off-chain data.

In this whitepaper, we cover the success stories of Plugin since its inception and the launch of PLUGIN 2.0, an enhanced version of Plugin's decentralized oracle network built on XDC blockchain network. While Plugin continues to provide secure, scalable and decentralized oracle, PLUGIN 2.0's new architecture is aimed to provide better performance of oracle, utilization of resources and to help users to participate in our network with minimum infrastructure.

## 2. PLUGIN - Decentralized Oracle Network(DON)


Decentralized Finance (DeFi) applications need reliable price feeds, and other smart contracts and decentralized applications (DApps) built on blockchain require a variety of real-world data inputs ranging from current events and sports, to weather, or even random numbers. A DON aims to offer these with strong confidentiality, integrity, and availability properties, as well as accountability. Decentralized oracles achieve trustlessness and deterministic results by distributing trust among many network participants.

### 2.1 Plugin's Decentralized Oracle Network Overview

Plugin's DON serves as a powerful and flexible tool for developers to create off-chain support for their smart contracts on the XDC network.

Plugin Decentralized Oracle Network comes with:

- Highest Level of Security
- Decentralized Architecture to prevent single point failure
- Censorship resistance
- Developer friendly interface for ease of deployment & operation

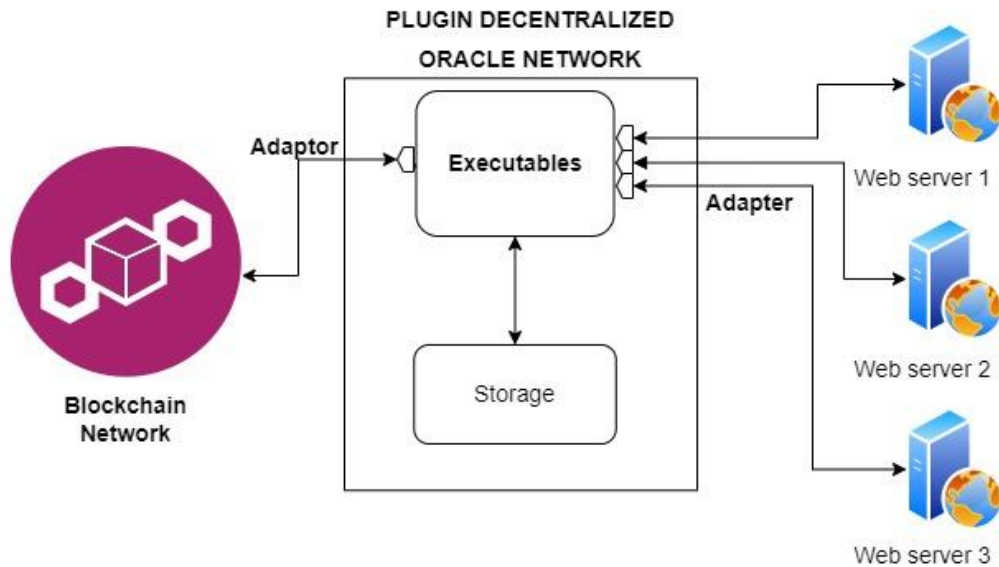

Conceptual representation of Plugin's Decentralized Oracle Network

**Executables:** Programs that run continuously and in a decentralized manner on the DON. They provide high performance and confidential computation but they do not directly store main-chain assets. Executables run autonomously on a DON and perform deterministic operations. They work in hand with adapters that link the DON to external resources.

**Adapters:** Adapters operate bidirectionally to fetch data from sources. They may additionally leverage joint computation by oracle nodes to achieve additional functionalities, such as encrypting reports for privacy-preserving consumption by an executable.

**Storage:** Local storage for the executable to additionally read and write to local DON storage to keep state and/or communicate with other executables. While critical data is stored in Blockchain, this storage is used to store the event logs which get archived periodically from the respective nodes.

## 2.2 PLUGIN Interfaces

Plugin's DON has powerful interfaces that enable many use cases using the XDC blockchain network.

### 2.2.1 Networking

Plugin adapters are the interfaces that help the executables to do bidirectional communication on and off-DON systems. Adapters may be bidirectional—i.e., they can not only pull data, but also can push data from a DON to a web server. They may also leverage distributed protocols as well as cryptographic functionality such as secure multi-party computation. Adapters help in interfacing with

- **Blockchain:** Adapter, defines how to send transactions to blockchain and how to read blocks, individual transactions or state from it.
- **Web Server:** Off-chain data comes from the Web servers and legacy systems. Adapter's API interacts with the Web server to fetch the data.
- **External Storage:** An adapter can define methods to read and write to storage services outside the DON, such as a cloud storage or other file systems.

### 2.2.2 Computation

Executables are the prime unit of computation for DON. Plugin initiators initiate the execution processing depending on some external condition. Once the job is initiated by the initiators, executables have a deterministic logic to complete the assigned job.

### 2.2.3 Storage

DONs can store data locally or externally in storage such as File server or Cloud servers for use in their specifically supported services. Adapters are used to access the data stored off-chain and Plugin's DON can make use of such data in a confidential way, computing on data that is a trusted execution environment.

## 2.3 PLUGIN Community

Plugin's DON has a strong community support to provide seamless data transfer between blockchain network and web server systems.

**Oracle Node Operators:** Oracle nodes are the backbone of Plugin Network. Plugin has node operators spread across the globe with nodes providing consistent data to blockchain. Plugin encourages and assists node operators to set up their node with cloud service providers offering 99.9% availability. Plugin has a capped limit to onboard up to 2000 node operators and all the requests are approved after the review and approval of the Plugin Governance committee.

**Data Feed Providers:** DFPs offer a seamless way of integrating the data with decentralized applications by providing APIs to smart contracts. After review and approval of the data feed API by Plugin's governance committee they can start providing data to the blockchain DApps and monetize the same.

## 2.4 Plugin partnerships

### 2.4.1 TeejLab Inc

Plugin collaboration with TeejaLab has made it possible for our node operators and data feed providers to explore numerous Application Programming Interfaces (API's) with reduced exploration costs and simplified establishment of dashboards and tasks. With this partnership, Plugin also demonstrated its commitment to securing ecosystems with quality and verifiable data feeds. Plugin's blockchain and DON expertise with TeejLab's knowledge



in latest IT technologies and data-science-driven tech to quantify and mitigate compliance and security risks promises secure,scalable and cost effective solutions to our customers.

Plugin and TeejLab partnership eases the process to become a data feed provider. Users can subscribe to TeejLab, find the right index pair they would like to provide, set up a job feed and start contributing.

### 2.4.2 Inclusive Growth Chain

Plugin's partnership with Inclusive Growth Chain helps us to strengthen the technology partnership and offshore development team set up. Through hackathon participation, IGC conceptualized the Air pollution tracking which is a good example to illustrate the power of DON in blockchain use cases. This project sought to collect and aggregate real-time air pollution data onto a blockchain-based platform and Plugin act as an oracle service feeding off-chain pollution data onto the blockchain-based platform. This project has managed to avail actionable pollution intel to numerous users in different industries. In particular, the real-time weather intel has helped players in real estate, air purifying equipment, healthcare, and government agencies.

### 2.4.3 Agri Tech

Today, agriculture plays an important role in creating wealth across the globe. However, numerous challenges continue to impact the sector, limiting yields and increasing incidences of loss. A notable challenge affecting today's agriculture and causing great losses among smallholder farmers is *Climate Change*. Plugin and a renowned Agri Tech Company in India partnered to unlock the synergies in weather intelligence via Plugin's Weather Forecast Node (WFN) project. Using data collected and processed through registered and globally-placed hyperlocal sensors or weather stations, the WFN project has made it possible for more accurate and reliable agricultural support services. Particularly, the WFN project has been quite successful in helping farmers plan important processes on their farms and helping the processing of insurance claims for farming-related activities.

### 2.4.4 Ambient Global

Plugin collaboration with Ambient global allows individuals or enterprises to take part in the Plugin WFN project by purchasing Ambient's smart weather system.

Upon approval and staking of the required amount (1000 PLI & 5000 XDC), individuals / enterprises are allowed to gather weather-related data for Plugin WFN's project. The users, thereafter, claim their reward for providing weather-related data. This partnership will help to increase the utility of weather forecast data, contribute to mitigating climate-related effects globally, and nurture the Sensing-as-a-Service (SEaaS) business model.

### 2.4.5 FireBlocks

We have increased the utility of Plugin's Decentralized Oracle Network with Fireblocks easy to develop new blockchain-based innovations. Given numerous innovations

built on the Fireblocks platform and the growing need of reliable off-chain data to support different smart contracts, Plugin is rightly placed to bridge between off-chain and on-chain data. The partnership will greatly improve the utility of Plugin's data feeds.

## 2.5 Plugin's key design focus areas

**Heterogeneous Oracle Network:** Plugin is planned to become a heterogenous, permissionless oracle network that can run multiple oracle networks simultaneously allowing the nodes to perform tasks independent of other nodes and networks. This will provide unbound flexibility for developers. Each network can be built for a specific purpose to serve the exact external data and provide off-chain computation for any smart contract applications.

**Abstracting the complexity:** Plugin Oracles abstracts the complexity from end users and developers. Plugin Feeds Marketplace provides new ways of bridging oracle into user's smart contracts and allows users to focus more on their use case and avoid spending time on oracle integration, understanding the backbone of oracle and spending time on API genuinity, FIAT & Crypto etc.


**Scalability :** Network congestion is becoming a recurring problem in existing permissionless blockchains making it difficult for DApps to achieve the desired low latency. It is important for Oracle services to achieve low latencies and higher throughputs to meet the performance demands. Plugin is focussed on enhancing the scalability and minimizing on-chain fees (e.g., gas costs) for contract operators and ordinary users.

**Order-fairness for transactions:** Transaction sequencing is a paramount task for the blockchain network since miners and validators can control the transaction sequence. Plugin Decentralized Oracle Network, applies a fair sequencing process which eliminates the transaction order disarray and continues to optimize the transaction processing.

## 3. PLUGIN 2.0: Plugin Improvement Protocol(PLIP)

Plugin is initially conceptualized as a fork of Chainlink open-source technology and developed by a large community of developers, researchers, and users who share the common goal of building an effective decentralized oracle network for the benefit of the XDC Network ecosystem. Expanding the Oracle network and increasing the strength of the ecosystem, we have come up with a new Plugin Improvement Protocol(PLIP) developed to increase the performance and stability of the oracle network.

Node operators are the strength to any decentralized oracle network and more node operators and data feeds contribute to better aggregation processes and accurate results. To expand the Plugin's community of node operators and onboard new node operators with minimum infrastructure, Plugin has come up with a new implementation protocol categorizing the node operators into three buckets to increase network stability and add new nodes to the network.

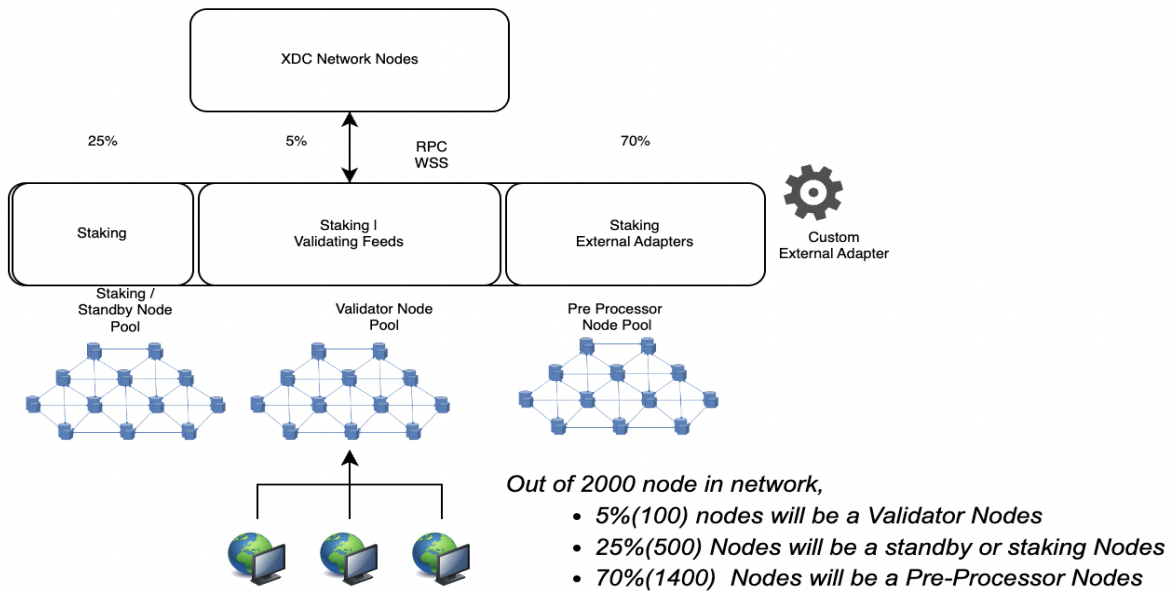

Plugin Node Network Pool Design

### 3.1 Validator Node Pool/Processor Node Pool

Validator Nodes set up the oracle jobs and provide data feed for end customers. Nodes are expected to run 24/7 and provide seamless connection to the master nodes. Separate **node monitor tool**, will be executed to identify the oracle health status and see if the event is emitted as per the schedule. Periodic execution of jobs is necessary to provide high data integrity & availability to end customers.

#### 3.1.1 Criteria for Onboarding Validator Nodes

- 1) Node Operators should have strong technical knowledge to handle the issues that might arise in their nodes.
- 2) Data Integrity should be very high and the availability of nodes should be 99.9%.
- 3) Validator node operators should be transparent in providing the data feed.
- 4) Provide clear documentation & information to the Plugin Governance Committee to review & approve and list the data feed in "<https://feeds.goplugin.co>".
- 5) Node operators can set up the data feed, after the Governance Committee approves the request.

Validator node submission is similar to "Node Submission Process", but users will have to submit a special "validator request" form to consider the node to be a validator. It is important to know that approval is subject to open requirements for validator nodes. The Governance Committee can reject your request, if "Clause(A)" is not fulfilled.

Clause(A) states

- Requirement for Strengthening the Validator Network is available. (Requirement for validator nodes is currently capped to 100. There should be

a requirement for Validator nodes and existing validator nodes count is within the capped limit).

- Validator Node is not in “**Off/Idle State**” for more than **2 days**
- Validator node with no negative remarks from end customers

### 3.1.2 Infrastructure requirement for Validator Nodes

- 1) RAM 8GB to 16GB
- 2) Storage - Minimum 250 GB
- 3) Ubuntu OS 20.04
- 4) AWS Cloud / Other Cloud which guarantees high uptime

## 3.2 Pre-Processor Node Pool

Pre-Processor nodes will act as bridges and provide external adapter service to Validator nodes. If this node doesn't return expected results or returns an error, then this node will be considered idle state or “Not Responsive” and if the node continues to be not responsive for 2 days, it will be moved to Standby Node pool.

### 3.2.1 Criteria for Onboarding Pre-Processor Nodes

Standby Nodes can be moved into “Pre-Processor Nodes”, provided if they meet the following criteria

- 1) Execute ProcessUpgrade command to move your node from standby/staker to Pre-Processor Node
- 2) Check “feeds.goPlugin.co” & choose the adapter(s) you want to set up in your node
- 3) Expose the port number to only specific IP address(Validator Node Pool)
- 4) Share the external adapter details via node operator platform for approval.
- 5) Infrastructure requirements for these nodes are minimal so you can choose optimal infrastructure.
- 6) Host on a cloud service provider with a promise of 99.9% uptime

### 3.2.2 Infrastructure requirement for Pre-Processor Nodes

- 1) RAM min 4GB
- 2) Storage - Minimum 100 GB
- 3) Ubuntu OS 20.04
- 4) Any cloud

## 3.3 Staking Node Pool/Standby Node Pool

Standby Nodes are existing staking nodes, and they are like standby warriors with minimum infrastructure which shall be upgraded to Validator nodes when they build the recommended infrastructure and show expression of interest and qualify to be a Validator node or when oracle needs further decentralization and more data feeds.

### 3.3.1 Criteria for standby nodes to become validator nodes

- 1) Node should be setup in AWS / or any cloud with an SLA of 99.9% uptime or higher
- 2) Node should meet the “Validator Node or Pre-Processor Nodes” infra requirement

- 3) Oracles should be highly secured
- 4) External Adapter should be up & running

A request should be raised by the “**Standby Node**” operator as “**Expression of Interest**” (EOI) in the platform. This EOI will be reviewed by the Governance Committee and approved if the prescribed conditions are met.

### 3.3.2 Infrastructure requirement for Standby Nodes

- 1) RAM 2GB to 5GB
- 2) Storage - Minimum 50 GB
- 3) Ubuntu OS 20.04
- 4) Any cloud

## 3.4 Advantages of Plugin Improvement Protocol

PLIP is implemented to enhance the stability of the oracle network and provide improved performance to the applications utilizing Plugin’s DON.

**Strong Node Backup:** With three layer node structure, Validator nodes are always backed by Pre-processors and standby nodes that are ready to become validator nodes and support in data feed.

**Better RPC Management:** With this implementation, we will have a minimum RPC requirement to manage the load. It will also help in setting up our own full nodes to balance the network traffic.

**Effective Approval Process:** Plugin is backed by a strong governance committee to ensure the nodes are chosen after establishing the prescribed standards in terms of infrastructure and data integrity. Validator nodes are chosen after proper scrutiny to ensure transparency, recommended infrastructure and technical knowledge of the validator nodes.

**Transparency:** Approving a node to be a validator has to go through the KYO/KYP process. Once the KYP is done, the validator details will be shared to the public to build the trust.

**Proper Dissemination of rewards:** Plugin is improvising the reward distribution mechanism with the implementation of PLIP. The node operators are categorized as Validator nodes, Pre-processor nodes and Standby nodes and with this the responsibilities for each type of nodes are also clearly defined. Now, the reward dissemination will be based on the responsibilities and the users are allowed to charge a fee for the service they provide. This improves the reward dissemination by providing more rewards for the nodes with greater responsibilities.

## 3.5 Implementation Plan

Implementation steps to be followed to set up this network pool are

- 1) Set up “Separate” RPC for Validator Node Pool to allow validator node pool to use a dedicated RPC. This will provide high connectivity and data availability.

- 2) Validator to submit KYO & KYP to become a validator.
  - a) **Know Your Operator:** Basic details of the node operator that will only be open to “Plugin Governance Committee”
  - b) **Know your Provider:** Details about feeds and APIs used by validator nodes that will be shared to Public
- 3) Onboard Validator Nodes & form a node pool
- 4) To convert their staking node to “Pre-Processor” Node, node operators are expected to run “Process Upgrade” script
  - a) This will stop the existing RPC connection made during node setup
  - b) Clean-up the pm2 process
- 5) Revisit and define the Reputation evaluation program
- 6) Provide an option to show the list of “External Adapter”(EA) submitted by Pre-Processing Node Operators. Validator Node should be able to view this list and use it in their oracle nodes.
- 7) Establish a “Task Pool”, a new feature to monitor and enhance the stability of the protocol. Sample tasks pools which Pre-processor / Standby Nodes can be part of
  - a) Option for Preprocessor or Standby Nodes to run any tasks from the pool, to open their additional revenue stream separately.
  - b) External Adapter Job Execution for Single & Aggregate Jobs
  - c) Oracle Health Monitoring Tool
  - d) Metrics Report Generation
  - e) API Periodic Evaluation
  - f) Data Matcher: Perform cross-vetting of data from different API’s & measure the difference in value.
  - g) Validator Node Health Status
  - h) Log Aggregator
  - i) Alert Mechanism for “Short of Storage” and other high resource utilization alerts

### 3.6 Revenue Stream

In addition to the staking rewards received by the operators, here are the additional revenue streams that one can make revenue by running these activities

ACTIVITY	OWNER	DESCRIPTION
Run Validator Nodes	VALIDATOR	Setup Data Feed & Provide Index Pair Services
Run External Adaptor	PRE-PROCESSOR	Setup External Adapter for complex business logic and list them for validator to use
Run Task from Task Pool list	STAKER / STANDBY	Select the tasks from the pool & run the same to generate the metrics

### 3.7 Reputation

Reputation of a node is critical to strengthening our Plugin Oracle Network, hence it is the prime responsibility of every node operator to periodically review their node health by

ensuring high time availability. Plugin Node Reputation will be calculated based on the following metrics. At present, we are evaluating only the system heart beat to measure the performance of the nodes. After this architecture implementation, below are the factors that will influence the reputation.

METRICS	DESCRIPTION
Heart Beat	System Heartbeat
Oracle Health	Check the event emitted
EA Health	External Adapter Response
EI Port Health	External Initiator response
Index Price Feed Response	Price Feed Setup by Validators should be providing valid & successful return code
Log Rotation	Archiving the logs periodically
Periodic Maintenance	Periodic node maintenance
Internal Contract Health	Check the event emitted

## 4. Plugin Data Feeds

Blockchain world needs to connect with the outside network to make more beneficial use cases. For example, to have DeFi, we need to get the price of Ether (ETH) and other cryptocurrencies into a contract. Another example where it requires meteorological data to provide decentralized and trustless insurance. Data Feeds are the quickest way to connect your smart contracts to the real-world market prices of assets such as gold for example.

Plugin covers a wide range of Data feeds and converts them to a real time use case such as Weather forecast, Stablecoin pairs and foreign exchanges.

With more than 1700+ active node operators and data feeds coming from different regions of the world, Plugin uses a standard data feed logic to receive the off-chain data, aggregate them and send accurate price value for the asset.

How does Plugin data feed work?

1. A DeFi protocol or Smart Contract requests an update (Example- Price of a Crypto)
2. It launches the event from a smart contract.
3. The task is then distributed to a specified number of validators.
4. The Validator node, who vet the data from the reliable data source, provides the pricing information back to the aggregator smart contract.
5. Aggregator then captures the data from multiple oracles and writes the aggregated data on-chain.

## 4.1 Components of a data feed

**Consumer contract:** Consumer contracts call functions on the proxy contract and retrieve information from the aggregator contract.

**Internal contract:** Internal contracts are on-chain proxies that point to the aggregator for a particular data feed. These internal contracts enable the underlying aggregator to be upgraded without any service interruption to consuming contracts.

**Aggregator contract:** An aggregator is a contract that receives data from multiple data sources and provides aggregated value on-chain. Consumers can retrieve the data and act upon it within the same transaction.

## 4.2 Types of Data Feeds

Depending on the usage, data feeds can be classified as Price Feeds, Sports Feeds, Proof of Reserve Feeds and there are many custom data feeds which solve a very specific use case. Here are some of the data feeds available and upcoming in the Plugin network.

### Price Feeds:

- StableCoins pair: Plugin data feeds tracking stablecoins pairs.
- Cryptocurrencies - XDC pair : Tracking cryptocurrencies paired against XDC
- Cryptocurrencies - other pairs: Tracking cryptocurrencies paired against others.
- Foreign Exchanges: Plugin Data Feed tracking forex pairs.

**Proof of Reserve Feeds:** Track the price of the real world asset from various data feed operators.

**Custom Data Feeds:** Plugin has developed a few custom data feeds for DApps developed on the XDC network using Plugin Decentralized Oracle Network.

- Weather Forecast: Data feeds to get the weather data from different nodes.
- Carbon Offset(upcoming): Data feeds to get carbon emission data from nodes.
- Pollution Sensor(upcoming): Data feeds to get the air pollution level from nodes.

## 4.3 Setting up Data Feeds

**XDC Network:** Plugin has most of the standard data feeds available for use for building DApps on XDC like real time index pair rates. Documentation with detailed steps on the integration of data feeds can be found at <https://feeds.goplugin.co>.

**Other Blockchain networks:** Plugin has made it easier for developers in other blockchain networks to just download Plugin's data feeds as a NPM package and integrate it with a few steps.

- Download NPM package from [npmjs.com](https://npmjs.com)
- npm install Plugin-pricing-index-pair
- Choose the feed you want to access
- Fund #PLI (Oracle Fee)



## 4.4 Advantages of Plugin Data Feeds

**Highly Decentralized:** Plugin has 3 tiered network pool composed of Validator, Pre-processor and Standby warriors and the data feed is obtained from decentralized oracle nodes.

**Reliable Datasource Partner:** Plugin has partnered with “TeejLab” - Ocean of API providers for reliable datasource.

**Implementation made easy:** NPM package that you can access to consume NPM package that can be installed to get the price feeds from Plugin network and the results can be used in smart contracts built on other blockchain networks.

## 5. Plugin Ecosystem

**Node Operators:** Plugin network is built on independent node operators, making it a decentralized Oracle technology. Plugin nodes have job specifications registered with each node to execute jobs coordinated by the on-chain Oracle contracts. Plugin Improvement Protocol(PLIP) allows users to onboard as node operators with minimum infrastructure and start contributing to the network. Users with good technical knowledge and prescribed infrastructure can be onboarded as validator nodes with approval from the governance committee. The node operators are rewarded with the Plugin’s native tokens(PLI) for their commitment in Plugin’s DON.

**Data Sources:** Plugin strongly encourages the data feed providers to actively participate and constantly share trustable data. Plugin has a tie-up with a reliable API provider TeejLab to securely transmit the data from data feed to the blockchain network. Node operators are rewarded for the trustable data and any false data will be penalized through the ‘carrot and stick’ method.

**Off-Chain Computation:** Plugin nodes not only provide data delivery capabilities but can also perform trust-minimized off-chain computation such as generating verifiable randomness, calculating insurance quotas, and more.

**Data Aggregation:** Plugin Oracle network is equipped to perform different forms of aggregation depending on the data type such as taking the median, mean, mode, or any other strategy to combine multiple data points into one. Plugin strength of nodes and data from a variety of sources makes aggregation more effective and provides accurate and aggregated feed to the customers.

**Security Parameters:** Security forms the most important aspect of the Plugin ecosystem. All our nodes are safeguarded with a strong firewall. Service agreements are put in place for the security requirements such as specifying the amount of collateral to be deposited by oracles, length of service, uptime requirements, and other considerations for the node operators and the users.

## 6. Plugin Tokenomics

Plugin has started with robust tokenomics through controlled minting, incentives and effective distribution of tokens. Plugin's optimistic transformation and invention of new features such as restaking, yield farming has strengthened our tokenomics and the below table provides details on the initial allocation and current distribution of PLI tokens.

#	Subject Description	Token Allocation at the time of launch of Plugin	Token distribution at present*
1	Ecosystems Adoption and Development Rewards	40%	35.5%
2	Promoters and Founders	18%	18%
3	Advisors, Partnership, Market Making & Exchange Listing etc	15%	13.3%
4	Community Placement	10%	10%
5	Contingency	10%	10%
6	Core Team Members and Technology Ops	7%	1.08%
7	Inmarket Circulation	0%	12.12%
Total		100%	100%

\* as on the date of publishing this whitepaper.

### 6.1 Proof of Reserve for Staking

Plugin's proof of reserve for staking offers users an easy-to-use interface where node operators and yield farmers can verify their stake. Given that the main objective of the platform is to increase the community member's "Trust" and "Transparency", the platform enables members to check whether their PLI stakes are locked in smart contracts and that there's no entity or individual that has central control over the stake.

For users that stake their funds on Plugin---yield farmers or node operators---the funds will be locked-in for a period of one year. Nonetheless, Plugin's governance committee may make some exceptions, allowing some users to remove their funds before the one-year period elapses.

## 6.2 Re-Staking

Re-staking is a concept of Plugin's customer centric innovation which allows our node members who have reached the maximum limit of staking PLI tokens, an option to re-stake their PLI rewards/tokens and get more benefit from restaking pool. This automated process allows the users to enable restaking by enabling a simple toggle button and earn rewards for the restaked tokens. Restaked tokens will be locked for a year for the users to get complete benefit of the accumulated rewards and to increase the value of our PLI tokens.

## 7. Plugin Innovations

We always stay futuristic and try to bring out of the box innovations that not only benefit us but the entire Web3 community. Listing down a few of the innovations that simplified the process, reduced the development time and improved the quality of the product.

### 7.1 Plugin Truffle Box

Plugin Crypto Adapter Truffle Box is a boilerplate, which allows users to bring oracle service up & running in a few minutes. This template, by default pulls data from cryptocompare.com and fetches information for index pairs that you are passing from Smart Contract. Plugin's truffle box can be very handy with the following activities

- Deploy consumer contract
- Deploy Oracle Contract
- Run Fulfillment
- Run Adapter
- Run approve PLI transfer
- Run PLI transfer to consumer contract
- Submit request for pricing

### 7.2 React-Solidity-XDC3 Web package

Blockchain developers and enthusiasts can understand the complexity of evaluating which web3 packages/libraries is better to use to build an application. Though we have ethers, xdc3 libraries, it is always a cumbersome process for a beginner when they want to try out and bring their idea into reality. We have built a new npm package "react-solidity-xdc3". A complete package, which takes care of connecting your client application to smart contract in just a few lines of code. Using this package, you can write data, query data, query events, convert price to wei, wei to price, xdcpay wallet integration & many more.

#### Installation Steps

- npm install react-solidity-xdc3
- README has the details - <https://www.npmjs.com/package/react-solidity-xdc3>

**How does it work?**

- Try this <https://github.com/GoPlugin/dapp-react-solidity-xdc3> implementation sample
- Go through README.md file for step by step instructions on how to setup DApp using react-solidity-xdc3

React-Solidity-XDC3 Web package performs the following tasks

**Function and Description**

Functions	Descriptions
executeTransaction	It calls the send Transaction and writes the data onto Blockchain
queryData	It queries the data from Blockchain for a given function, you can read mapping variable, view function, public variable using this function
queryEvents	It enables you to read event details by passing block number
createWeb3Provider	It connects web3 with chosen wallet(metamask, Torus, WalletConnect)
createcontractInstance	It enables you to create an instance for your contract
Ethereumcontext	It enables you to set up in main app.js and read those in other components
showToasts	It enables you to show toast message after successful execution
showError	It enables you to show error message when there is a failure
log	it enables you to print detailed log by passing three parms
convertPriceToEth	It enables you to convert price to Wei
convertPricefromEth	It enables you to convert wei to actual price
upload	It enables you to upload images to IPFS
checkCurrencyBalanceForUser	It enables you to fetch balance for user
getTransactionReceiptMined	In Progress
MetaTxn	In progress

We are constantly updating this package to give complete functionalities required to build an enterprise grade decentralized application.

## 7.3 Accept XDC or XRC20 tokens as Payment method

We have created a package to accept XDC or XRC20 token as Payment method in your website or web application in a few lines of code. With this package there is no need to calculate any conversion of currencies, users can just pass an amount, payment method and fiat currency and the package will perform the task for you. With this the users can easily capture the return response for onSuccess, onFailure and onError functions. Currently this package supports XDC and PLI tokens. Integration steps can be found in [npmjs.com](https://npmjs.com).

## 7.4 Connect XDCPay wallet with Web3Modal

A simple package for the easy integration of XDCpay with Web3Modal.so. This package will solve the difficulties for the users in connecting the XDCPay wallet with Web3Modal. Along with the solution and simplified steps for implementation is also provided for the users at [npmjs.com](https://npmjs.com)

## 7.5 Automation of Data Feeds Set up

Plugin has developed an automation script for the validator nodes to set up the data feeds quickly with abstracted complexity. The deployment of oracle and other contracts has been handled using Hardhat and creation of Jobs and bridges is powered with the help of shell scripts. This will reduce the efforts of setting up data feeds and this automation will make the data feed available for the user in a short span of time.

# 8. Plugin Game changing DApps

Plugin's Decentralized oracle networks has opened the capability to build a wide range of applications on XDC and other blockchain networks and we have built some exciting Decentralized applications using Plugin's data feeds and adaptors.

## 8.1 Plugin Weather Forecast Node

A decentralized application, built on XDC Network to get real-time weather data. With the advent of evidence of climatic change, it is extremely important to have precise weather forecasting for every industry to make insightful decisions. Plugin Weather Forecast Node built on XDC Network brings the data from various regions across the globe at granular level. Through efficient data processing from various units across the globe, the data lake that was built by Plugin in a decentralized world will witness a new economy in the future. Plugin Weather Forecast Node built on XDC Network brings the data from various regions across the globe at granular level.

## 8.2 Plugin Crop Loss Compensation

Plugin opens up diverse modern technical-oriented services to the agriculture sector across the globe with Plugin Crop loss compensation. Although agriculture plays a significant role in fostering wealth across the globe; changes in weather patterns, unexpected production cycles, a lack of actionable weather knowledge, and insufficient

mechanisms designed to offset negative consequences throughout the entire agriculture supply chain are just a few of the particular difficulties facing today's agriculture sector.

With climate change introducing weather uncertainties, there's a need for real-time weather data to help validate and verify damages for crop loss compensation. With the near real-time data to verify whether any specific weather conditions were experienced, causing specified problems, Crop loss compensation project ensures automated compensation to affected farmers, guaranteeing continuity in agriculture.

### 8.3 Plugin Real time air pollution tracking

Plugin Real Time Air Pollution Tracking (RTAPT) is a blockchain-enabled use case that allows air pollution tracking and tracing in real-time. The project aims to collect real-time data on air pollution, helping users with air pollution-related health issues or allergies make appropriate decisions. Plugin's (RTAPT) use case holds a lead position in helping track air pollution in real-time using data feeds from authoritative off-chain sources.

### 8.4 Plugin Flight Delay Compensation

Plugin Flight Delay Compensation, an innovative Blockchain-powered DApp would bring positive impact in the aviation industry globally. With Plugin's Flight delay compensation DApp, travelers can purchase and register for the coverage. Flight schedule and delays are tracked through data feeds and If a flight is delayed due to some unforeseen conditions, the compensation amount will be settled in the user wallet automatically.

### 8.5 Plugin Emergency Care Connect

Built on XDC Network, Plugin ECA will play a critical role in assisting doctors and healthcare institutions in analyzing a patient's profile and providing suitable treatment. Blockchain can transform the way a patient's electronic health records are stored and shared. It can provide a safer, more transparent, and traceable underpinning system for health information exchange. The patient will have complete control over their data and will decide, whom to share and revoke the access. The caregiver would be able to grant access to patient data, during an emergency period. This will definitely enable a seamless and secure way of storing health records in blockchain and retrieving them when needed.

### 8.6 Plugin's XDC Eco Drive

Built on XDC Network, Plugin's Eco drive encourages road transport users to drive in eco mode and earn actively tradable crypto tokens for reduction of carbon emission. Studies show that Eco-driving has reduced vehicles' fuel consumption and greenhouse gas (ghg) emissions by an average of 5.5%. This project will use an IoT based OBD sensor to read the carbon reduction using Eco mode of driving from the user's vehicle and reward him with a NFT token (Carbon Reduction Token - CRT) for every 100 KG of CO2 saved. Plugin also brings in corporations who want to invest in Carbon offsetting projects to buy the CRT tokens available for sale using XDC or PLI tokens. Eco drive will connect the general public and corporations to join hands and reduce carbon emission from the road transport sector.

## Conclusion

While Plugin's original whitepaper has set a benchmark in providing a secure and scalable Decentralized oracle network, whitepaper 2.0 has set forth a vision to go further and provide a broader range of services to smart contracts, utilize Decentralized oracle to provide curated applications for various industries and continue building innovative products in Defi space. Plugin Improvement Protocol(PLIP) and segregation of node operators will help us to operate on a higher scale of performance with minimal infrastructure requirement. PLIP architecture will steadily increase the flow of data and our partnerships with reliable API providers helps in safe and secure transportation of data between off-chain and on-chain work. Restaking functionality is another important milestone for Plugin which offers flexibility to our members in terms of staking and earning more rewards while we continue to build a strong and safe tokenomics. Our community members and the ecosystem partners stand as a pillar of support for us in achieving our milestones and we are committed to bring more partnership and collaboration to strengthen the network and implement more ideas in the Decentralized oracle network. We are excited about our next steps towards the futuristic vision and improved utilization of Plugin's decentralized oracle network in DeFi, healthcare, agriculture, environmental initiatives and become the goto partner for oracle services in the XDC network. We stay transparent in our goals and our progress towards the set goals. Plugin's goals and aspiring DApps are already captured and shared in our roadmap published on our website.

## Acknowledgements

As said by Ken Blanchard, "None of us is as smart as all of us". Plugin's success and achievements are made possible with key contributions from all our stakeholders. Thanks to our moderators, community members, advisors, clients and developers who support us with constructive feedback, improved benchmarks and bring the best out of the Plugin team. We would like to acknowledge XDC foundation and our ecosystem partners who share a common goal of making web3 a significant innovative space and motivates us to achieve our vision.

## References

1. Plugin official website: <https://goplugin.co/>
2. Plugin webpage for developers: <https://docs.goplugin.co/>
3. Plugin whitepaper V1: [White Paper - Decentralized Oracle Network Powered by XinFin Blockchain Network.docx](#)
4. Ethereum whitepaper : <https://ethereum.org/en/whitepaper/>
5. XinFin network whitepaper: <https://xinfm.org/docs/whitepaper-tech.pdf>
6. Chain link 2.0 whitepaper: <https://chain.link/whitepaper>